


## Non Locking Ring Pull Indexing Plunger

---

For use where high precision indexing is not required. Depth of socket adjustable with the supplied locking nut. Pulling on the ring retracts the plunger, releasing resets the mechanism.

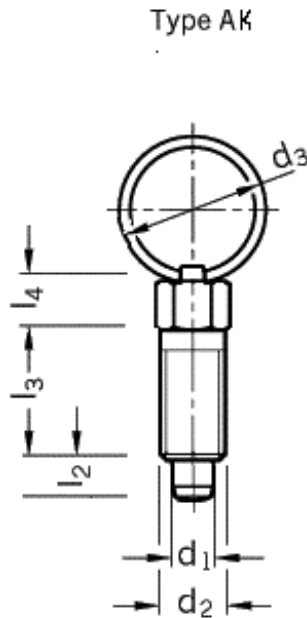

### Specification

Threaded socket  
Steel zinc plated

Plunger  
Stainless Steel  
1.4305

Spring  
Stainless Steel  
1.4310

Ring  
Stainless Steel  
1.4310

| Code | d1<br>Plunger | d2<br>thread | d3<br>ring | l2 | l3 | l4  |
|------|---------------|--------------|------------|----|----|-----|
| 4-AK | 4mm           | M6           | 14         | 4  | 12 | 4.5 |
| 5-AK | 5mm           | M8           | 18         | 5  | 16 | 6   |
| 6-AK | 6mm           | M10          | 24         | 6  | 20 | 7.5 |
| 8-AK | 8mm           | M12          | 30         | 8  | 24 | 9   |

All data is subject to manufacturing tolerances, changes can be applied without notice